

basic wire and cable

3900 N. ROCKWELL ST. CHICAGO, ILLINOIS 60618-3730, TEL: (773) 539-1800, FAX: (773) 539-3500

TYPE TC-G


TRAY CABLE

Three-, Four Conductors w/Ground

XLP Insulation

LSZH Jacket

600 Volts, 90°C Wet/Dry

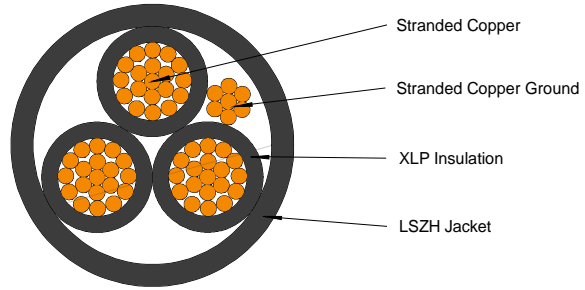

APPLICATIONS:

As three- or four-conductor power cables rated 600 volts, 90°C in dry or wet locations; specifically approved for installation in cable trays per Article 336 of the NEC. Type TC cables are permitted for use in Class 1 Division 2 industrial hazardous locations per NEC. Cables may be installed in free air, raceways or direct burial, in wet or dry locations. All cables when used in accordance with the NEC, meet the requirements of OSHA.

CONSTRUCTION:

Stranded copper conductors, XLP insulated, Method 4 phase-identified, insulated conductors cabled with a stranded copper grounding conductor in one interstice, cable tape, LSZH jacket overall, surface printed.

STANDARDS:

1. Conductors conform to ASTM B-3 & B-8.
2. Insulation conforms to UL 44, and is approved as Type XHHW-2.
3. Cables designed to meet UL 1277.
4. Cables designed to meet VW-1, IEEE-383 & IEEE-1202 tests.
5. Cables are suitable for sunlight resistant and direct burial applications.
6. Cables designed to meet requirements of ICEA S-95-658/NEMA WC70 & ICEA T-33-655.

SIZE/ AWG. KCMIL	GRD. COND. SIZE/AWG	BASIC CAT. NO.	O.D. in.	WEIGHT lbs/mft	BASIC CAT. NO.	O.D. in.	WEIGHT lbs/mft
THREE CONDUCTORS				FOUR CONDUCTORS			
8	10	6-703-G	.64	314	6-704-G	.71	385
6	8	6-713-G	.73	445	6-714-G	.80	558
4	8	6-723-G	.86	653	6-724-G	.94	820
2	6	6-733-G	.98	964	6-734-G	1.08	1214
1	6	6-743-G	1.12	1199	6-744-G	1.23	1704
1/0	6	6-753-G	1.20	1414	6-754-G	1.33	1825
2/0	6	6-763-G	1.29	1706	6-764-G	1.42	2223
3/0	4	6-773-G	1.42	2437	6-774-G	1.57	3123
4/0	4	6-783-G	1.53	2600	6-784-G	1.75	3444
250	4	6-793-G	1.74	3142	6-794-G	1.92	4048
300	4	6-803-G	1.84	3670	6-804-G	2.04	4790
350	3	6-813-G	1.95	4230	6-814-G	2.16	5470
400	3	6-823-G	2.06	4760	6-824-G	2.28	6210
500	2	6-833-G	2.23	5829	6-834-G	2.48	7579
600	2	6-843-G	2.47	6950	6-844-G	2.80	9230
750	1	6-853-G	2.77	9101	6-854-G	3.07	11746
1000	1/0	6-863-G	3.07	11780	6-864-G	3.41	15300

OPTIONS: Also available with tinned copper conductors, -SH Mylar Aluminum Foil Shield, -CT Copper Tape Shield, Voltage 1 or 2kV

Dimensional data not binding, we reserve the right to alter specifications without notice.
SHIPPING TOLERANCE +/- 10%

